

Day-0,1: Data Preparation and Introduction to ggplot2

Arvind Iyer

2024-10-15

Table of contents

Data Preparation	1
Importing data into R	2
Cleaning data	3
Data Visualization	4
Introduction	4
What is ggplot2?	5
References and Additional Materials	11
Materials	11

Data Preparation

Before visualizing data in R, you need to import it from an external source and format it properly. Ideally, data would come in a clean, error-free, rectangular format with no missing values, but that's rarely the case. In reality, data often requires cleaning and transformation to be useful for analysis. This process might involve handling missing data, correcting errors, restructuring columns, or converting data types. Proper preparation is key to ensuring that your visualizations accurately reflect the underlying patterns and insights in your data. A very import part of the data science life cycle.

Importing data into R

R can import data from almost any source, including text files, excel spreadsheets etc. How do we do it? It is simple:

```
# Load the library  
library(tidyverse)
```

```
-- Attaching core tidyverse packages ----- tidyverse 2.0.0 --  
v dplyr     1.1.4     v readr     2.1.5  
v forcats   1.0.0     v stringr   1.5.1  
v ggplot2   3.5.1     v tibble    3.2.1  
v lubridate 1.9.3     v tidyr    1.3.1  
v purrr    1.0.2  
-- Conflicts ----- tidyverse_conflicts()  
x dplyr::filter() masks stats::filter()  
x dplyr::lag()   masks stats::lag()  
i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become
```

```
Salaries <- read_csv(file = 'data/Salaries.csv')
```

```
Rows: 397 Columns: 6  
-- Column specification -----  
Delimiter: ","  
chr (3): rank, discipline, sex  
dbl (3): yrs.since.phd, yrs.service, salary  
  
i Use `spec()` to retrieve the full column specification for this data.  
i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

```
Salaries <- read_tsv(file = 'data/Salaries.txt')
```

```
Rows: 397 Columns: 6  
-- Column specification -----  
Delimiter: "\t"  
chr (3): rank, discipline, sex  
dbl (3): yrs.since.phd, yrs.service, salary  
  
i Use `spec()` to retrieve the full column specification for this data.  
i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

```
# To know more about these function (any function) to check arguments of these functions.  
help("read_csv") # ?read_csv ?function would also show the help page.
```

Cleaning data

The most time consuming part. For this we use `tidyR` and `dplyr` packages. There are other ways to do the same. We will use `Salaries` data set (information about professor's salaries) for doing these tasks:

- Use `select` function to select some variables (columns)
 - Use `mutate` function to create a new variable.
 - Use `count` function to count a variable

```
# First lets get a glimpse of the data
glimpse(Salaries)
```

```
Rows: 397  
Columns: 6  
# rank      <chr> "Prof", "Prof", "AsstProf", "Prof", "Prof", "AssocProf", ~  
# discipline <chr> "B", ~  
# yrs.since.phd <dbl> 19, 20, 4, 45, 40, 6, 30, 45, 21, 18, 12, 7, 1, 2, 20, 1~  
# yrs.service <dbl> 18, 16, 3, 39, 41, 6, 23, 45, 20, 18, 8, 2, 1, 0, 18, 3, ~  
# sex        <chr> "Male", "Male", "Male", "Male", "Male", "Male", "Male", "Male", ~  
# salary     <dbl> 139750, 173200, 79750, 115000, 141500, 97000, 175000, 14~
```

```
# Use select function to select rank and discipline columns
subset <- Salaries %>% select(rank,discipline)
subset
```

```
# A tibble: 397 x 2
  rank      discipline
  <chr>    <chr>
1 Prof      B
2 Prof      B
3 AsstProf  B
4 Prof      B
5 Prof      B
6 AssocProf B
7 Prof      B
8 Prof      B
```

```

9 Prof      B
10 Prof     B
# i 387 more rows

# Use mutate to create a new column color using discipline where A:red and B:blue
subset %>% mutate(color=ifelse(discipline=='A','red','blue'))

# A tibble: 397 x 3
  rank    discipline color
  <chr>    <chr>     <chr>
1 Prof      B         blue
2 Prof      B         blue
3 AsstProf  B         blue
4 Prof      B         blue
5 Prof      B         blue
6 AssocProf B         blue
7 Prof      B         blue
8 Prof      B         blue
9 Prof      B         blue
10 Prof     B         blue
# i 387 more rows

#Use count function to count ranks
Salaries %>% count(rank)

```

```

# A tibble: 3 x 2
  rank      n
  <chr>   <int>
1 AssocProf 64
2 AsstProf  67
3 Prof      266

```

Must read and try to go through Data Transformation section of this [book](#)

Do a read of chapter-2 of this [book](#).


Data Visualization

Introduction

R offers multiple systems for creating graphs, but one of the most powerful and flexible is [ggplot2](#).

What is ggplot2?

ggplot2 is a data visualization package for R developed by Hadley Wickham that provides a structured approach for visualization. This package is built on the grammar of graphics, a structured approach to designing and constructing visualizations in a consistent and intuitive manner.

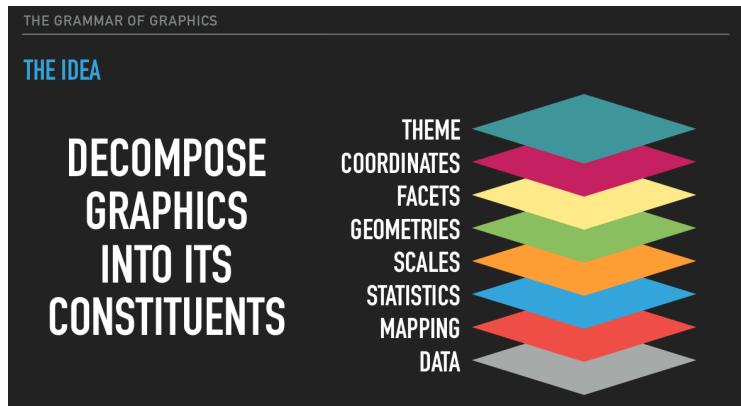

Lets see these in action with the famous `iris` dataset. First let see a summary of the data.

```
summary(iris)
```

```
  Sepal.Length    Sepal.Width     Petal.Length    Petal.Width
Min.   :4.300    Min.   :2.000    Min.   :1.000    Min.   :0.100
1st Qu.:5.100   1st Qu.:2.800   1st Qu.:1.600   1st Qu.:0.300
Median :5.800   Median :3.000    Median :4.350    Median :1.300
Mean   :5.843   Mean   :3.057    Mean   :3.758    Mean   :1.199
3rd Qu.:6.400   3rd Qu.:3.300   3rd Qu.:5.100   3rd Qu.:1.800
Max.   :7.900   Max.   :4.400    Max.   :6.900    Max.   :2.500
Species
setosa      :50
versicolor  :50
virginica   :50
```

Figure 1 takes in data as the argument which will generate a empty plot.

```
ggplot(iris)
```




Figure 1: Passing data to ggplot2

Figure 2 adds Aesthetics to the plot.

```
ggplot(iris,  
       aes(x=Sepal.Length, y=Sepal.Width,  
            color=Species))
```

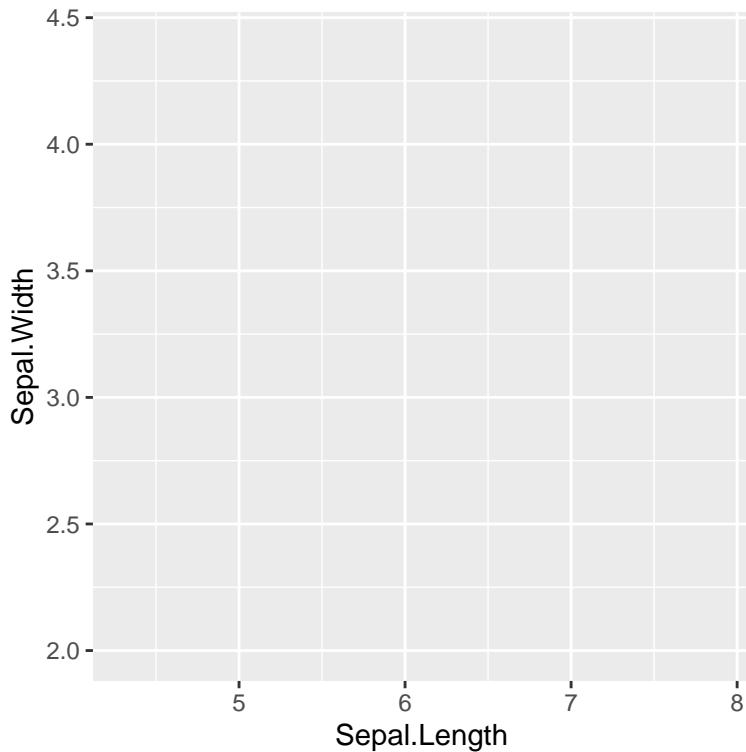


Figure 2: Adding Aesthetics

Figure 3 adds Geometries to the plot.

```
ggplot(iris,  
       aes(x=Sepal.Length, y=Sepal.Width,  
            color=Species))+  
  geom_point()
```

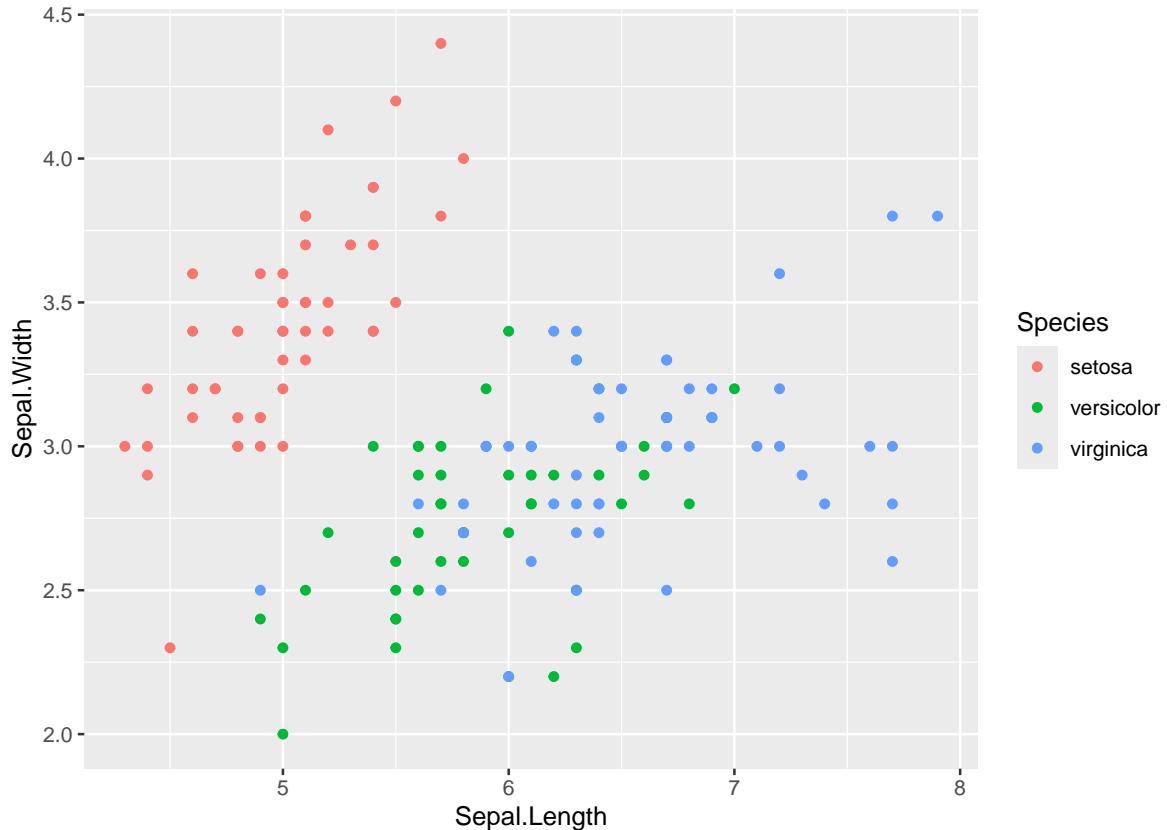


Figure 3: Adding Geometries

Figure 4 adds Scale to the plot.

```
ggplot(iris,
       aes(x=Sepal.Length, y=Sepal.Width,
            color=Species))+  
  geom_point() +  
  scale_color_brewer(palette = 'Dark2')
```

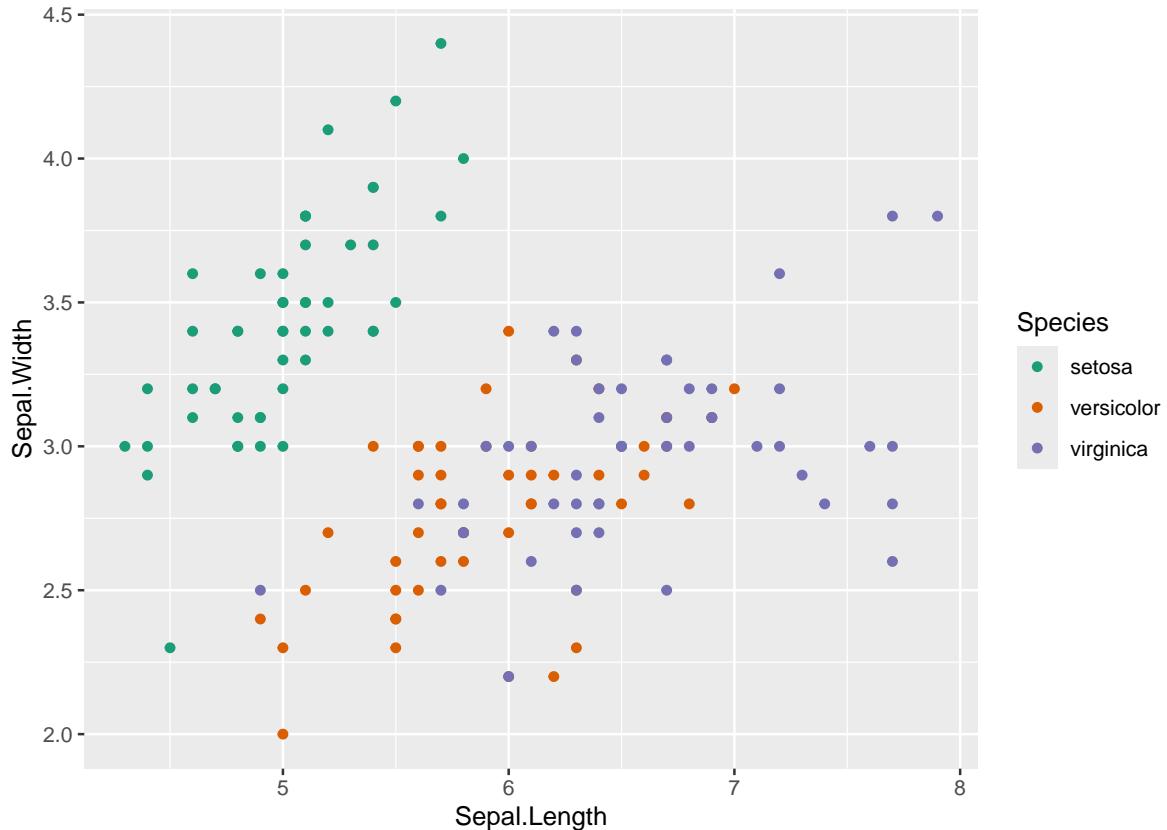


Figure 4: Adding Scales

Figure 4 adding Stats,theme,facets to the plot.

```
ggplot(iris,
       aes(x=Sepal.Length, y=Sepal.Width,
           color=Species)) +
  geom_point() +
  scale_color_brewer(palette="Dark2") +
  stat_summary(fun.y="mean", geom= "line") +
  coord_flip() +
  facet_wrap(~Species) +
  theme_bw() + theme(legend.position="top") +
  annotate("text", x=7.5, y=2.5, label="Pval")
```

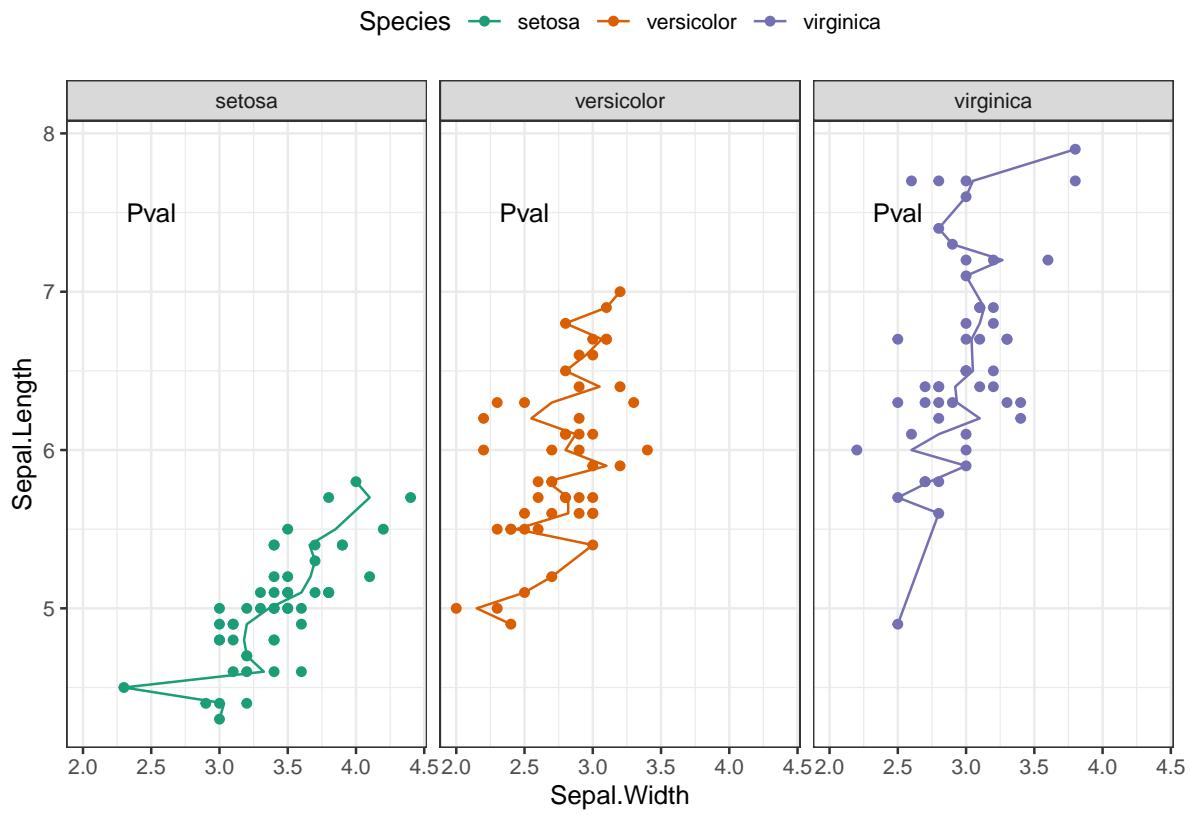


Figure 5: Adding Scales

Let's create a bar plot of variable `rank` in similar steps on `Salaries` data.

```
ggplot(data = Salaries, mapping = aes(x=rank,fill = rank,colour = rank))+  
  geom_bar() +  
  scale_fill_brewer(palette="Dark2") +  
  scale_color_brewer(palette="Dark2") +  
  theme_bw() +  
  theme(legend.position="top")
```

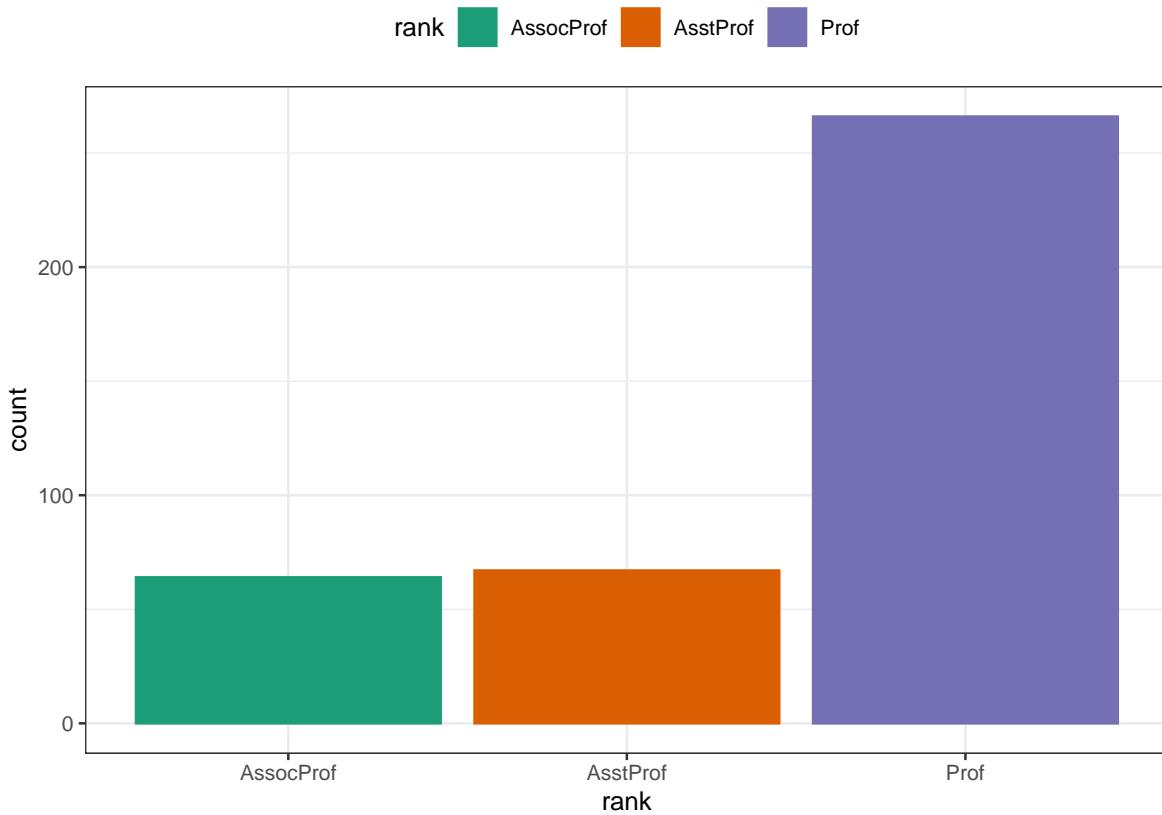


Figure 6: Creating Bar Plot

References and Additional Materials

For making this tutorial various online resources were used. Mentioning few over here:

- <https://ggplot2-book.org/>
- <https://socviz.co/index.html>
- https://github.com/thomasp85/ggplot2_workshop
- <https://rkabacoff.github.io/datavis/>
- <https://r4ds.hadley.nz/>
- <https://clauswilke.com/dataviz/>

Materials

	Description	Slides	Script
1	Introduction	Day_0 Day_1	Day_1